


- Single phase and DC input
- Short circuit, overload, input and output overvoltage protections
- Over temperature protection
- Suitable for standard applications
- Isolation Class 2, no grounding needed

NOTE

Please refer to the datasheet for more details
Above overcurrent limit, the protection starts cycling in ON/OFF mode(hiccup autoreset), the maximum current supplied depends by the line resistance

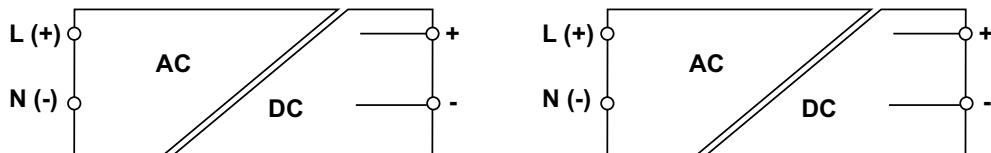

CODE	XCSD1030W024VAA		XCSD1030W012VAA
TYPE	CSD1-030W/024V/AA	CSD1-030W/012V/AA	
INPUT TECHNICAL DATA			
Input rated voltage	120–230 Vac	120–230 Vac	
Input voltage AC	85...264 Vac	85...264 Vac	
Input voltage DC	100...370 Vdc [derating Uin<130 Vdc]	100...370 Vdc [derating Uin<130 Vdc]	
Frequency	47...63 Hz	47...63 Hz	
Current consumption	0.56 A (120 Vac) / 0.34 A (230 Vac)	0.56 A (120 Vac) / 0.34 A (230 Vac)	
Inrush peak current	5 A	5 A	
Power factor	> 0.6	> 0.6	
Internal protection fuse	T 2 A	T 2 A	
External protection on AC line	MCB: C-3 A / Fuse: T-3 A	MCB: C-3 A / Fuse: T-3 A	
OUTPUT TECHNICAL DATA			
Output rated voltage	24 Vdc ±1%	12 Vdc ±1%	
Output adjustable range	—	5...15 Vdc	
Continuous current	1.25 A at 50°C	4A (5V), 2.9A (10V), 2.5A (12V), 2.0A (15V) at 55°C	
Overload limiting	2.0 A	6.9...3.0 A	
Short circuit peak current	—	—	
Ripple @ nominal ratings	50 mVpp	50 mVpp	
Hold up time	12 ms (120 Vac) / 20 ms (230 Vac)	12 ms (120 Vac) / 20 ms (230 Vac)	
Status indication	LED "DC OK"	LED "DC OK"	
Alarm contact	—	—	
Parallel connection	possible	possible	
Redundant parallel connection	possible with external ORing diode	possible with external ORing diode	
GENERAL TECHNICAL DATA			
Efficiency	88% (120 Vac) / 87% (230 Vac)	87% (120 Vac) / 86% (230 Vac)	
Dissipated power	4 W (120 Vac) / 3.9 W (230 Vac)	4.1 W (120 Vac) / 4 W (230 Vac)	
Operating temperature range	-20...+70°C (derating -1.2 W >50°C)	-20...+70°C (derating -1.2 W >55°C)	
Input / output isolation	3 KVac / 60 s (SELV output)	3 KVac / 60 s (SELV output)	
Input / ground isolation	class 2 without PE connection	class 2 without PE connection	
Output / ground isolation	class 2 without PE connection	class 2 without PE connection	
Standard / approvals	EN 60950-1, EN 62368-1	EN 60950-1, EN 62368-1	
EMC Standards	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4	
Overvoltage category / Pollution degree	II / 2	II / 2	
Protection degree	IP 20	IP 20	
Connection terminal IN/OUT	2.5 mm ² / 2.5 mm ²	2.5 mm ² / 2.5 mm ²	
Housing material	UL94V-0 plastic material	UL94V-0 plastic material	
Dimension	53x62x90 mm	53x62x90 mm	
Approximate weight	148 g	148 g	
Mounting information	vertical on a rail, 10 mm from adjacent components	vertical on a rail, 10 mm from adjacent components	
APPROVALS			
	  	  	
ACCESSORIES			
Mounting rail (IEC60715/TH35-7.5)	PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB	PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB	
Mounting rail (IEC60715/TH35-15)	PR/3/PP, PR/3/PP/ZB, PR/3/PA, PR/3/PA/ZB	PR/3/PP, PR/3/PP/ZB, PR/3/PA, PR/3/PA/ZB	
Marking tag	—	—	